

CCD-ICO86A/30M



Specifications:


MODEL	CCD-ICO86A/30M
Pick-up device	1/3" SONY CCD
ELECTRONIC PIXELS	PAL:752 (H) *582 (V)
SENSITIVE AREA	4.9mm*3.7mm
LENS MOUNT	f=4~9mm DC DRIVE/M12
SYNC MODE	Internal
RESOLUTION	480 TVL
MINIMUM ILLUMINATION	0Lux (IR ON)
S/N	>48dB
POWER SUPPLY	DC12V
GAMMA CORRECTION	0.45
GAIN CONTROL	AUTO
WHITE BALANCE	AUTO
ELECTRONIC SHUTTER	1/60~1/100000secs; 1/50~1/100000secs.
VIDEO OUTPUT	1.0Vp-p composite video, 75Ω
POWER CONSUMPTION	150mA · 450mA MAX(IR ON)
Lens	f= 4 ~ 9mm adjustable
IR distance	20~30m
OPERATING TEMPERATURE	-10°C ~ 50°C
angle of view (D*H*V)	98~38 *74.2~30 *53.7~22.5 degree
Dimension	Please refer to the right figure
Package Dimension	180*120*115mm
G.W	850g
N.W	750g


Installation kits inside packing:

- 1 wall mount Bracket
- 1 mounting template
- 1 power connector which allows power cable to be terminated to camera power connector
- 4 screws for bracket fix into wall
- 2 screws for camera fix on bracket
- 4 plastic screw anchors
- 1 screw driver for Zoom/ Focus adjust



Dimension:

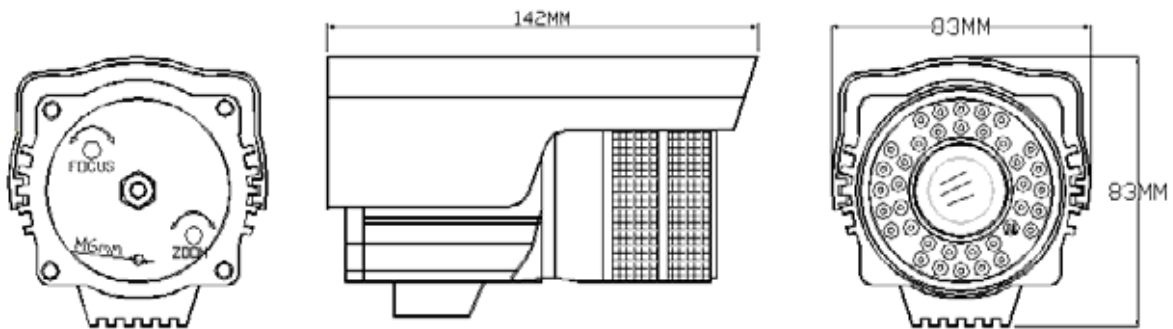

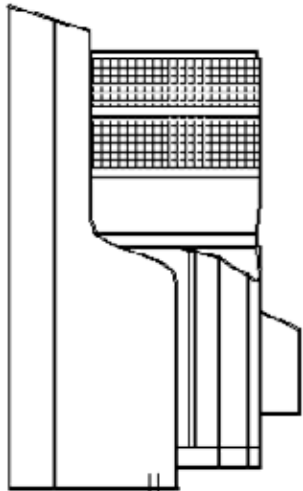

IN PUT DC12V



VIDEO OUT

